


DOOR COMPONENTS

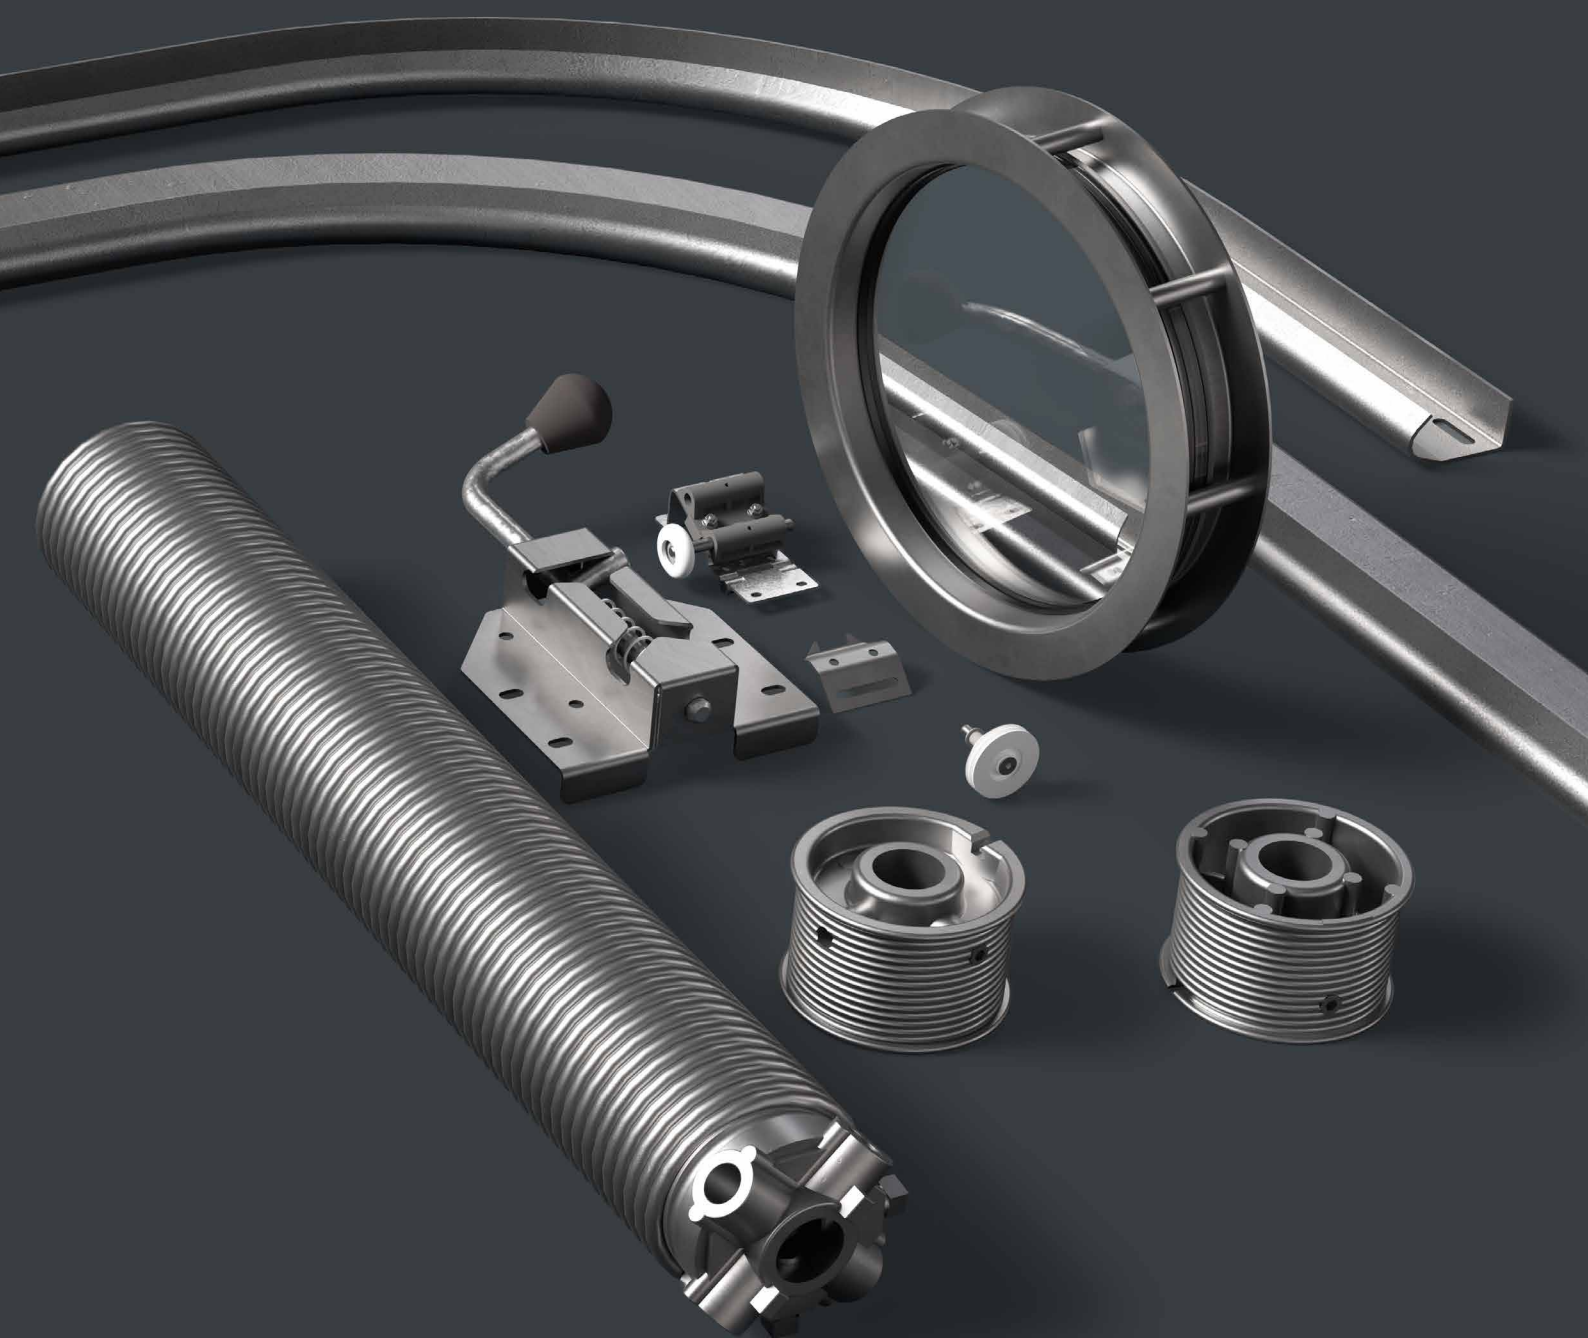

www.doorcomponents.eu


2026

EN Steel cable with nylon centre (max. 1960 N/mm²)
6 x 19 with Polypropylen

RU Трос стальной (макс. 1960 N/mm²)
6 x 19 с полипропиленом

LT Plieno trosas su nailonine šerdimi (iki 1960 N/mm²)
6 x 19 su polipropilenu

80001	= 3 mm	0,033 kg/m
80002	= 4 mm	0,058 kg/m
80003	= 5 mm	0,092 kg/m
80004	= 6 mm	0,130 kg/m



8000*
6x19 mm+pp

EN Eye for steel cable

RU Коуш для троса стального

LT Lašas troso kilpai

80005	= 3 mm	0,40 kg/100
80006	= 4-5 mm	0,50 kg/100
80007	= 6 mm	0,70 kg/100



8000*
diam. 3/4/5/6 mm

EN Oval cable colar, aluminium

RU Зажим для троса, алюминиевый, овальный

LT Aliuminis dvigubo troso suspaudiklis

80008	= 3 mm	0,25 kg/100
80009	= 4 mm	0,30 kg/100
80010	= 5 mm	0,70 kg/100
80011	= 6 mm	1,40 kg/100



800*
diam. 3/4/5/6 mm

EN Cable colar, aluminium. Round

RU Зажим для троса, алюминиевый, круглый

LT Aliuminis viengubo troso suspaudiklis

80012	= 3 mm
80013	= 4 mm
80014	= 5 mm
80015	= 6 mm




800*
diam. 3/4/5/6 mm

EN Oval 5.0 mm cable collar

RU Кольцо для троса овальное 5мм

LT Dvigubas trosas užspaudimas



31023

15x17x12 mm

0,01 kg/pc

EN Ring for cable

RU Кольцо для троса

LT Žiedelis trosui



31025

18x8 mm

0,01 kg/pc

EN Aircraft cable assembled:

RU Трос стальной в сборе:

LT Plieno trosas su kilpa:

90031	D = 3 mm	2 x 3000 mm
90041	D = 3 mm	2 x 4000 mm
90051	D = 3 mm	2 x 5000 mm
90061	D = 3 mm	2 x 6000 mm
90071	D = 3 mm	2 x 7000 mm
90081	D = 3 mm	2 x 8000 mm
90091	D = 3 mm	2 x 9000 mm
90101	D = 3 mm	2 x 10000 mm



901**

6x19 mm+pp

0,05 kg/m

EN Aircraft cable assembled:

RU Трос стальной в сборе:

LT Plieno trosas su kilpa:

90032	D = 4 mm	2 x 3000 mm
90042	D = 4 mm	2 x 4000 mm
90052	D = 4 mm	2 x 5000 mm
90062	D = 4 mm	2 x 6000 mm
90072	D = 4 mm	2 x 7000 mm
90082	D = 4 mm	2 x 8000 mm
90092	D = 4 mm	2 x 9000 mm
90102	D = 4 mm	2 x 10000 mm
90112	D = 4 mm	2 x 11000 mm
90122	D = 4 mm	2 x 12000 mm



902**

6x19 mm+pp

0,10 kg/m

EN Aircraft cable assembled:

RU Трос стальной в сборе:

LT Plieno trosas su kilpa:

90043	D = 5 mm	2 x 4000 mm
90053	D = 5 mm	2 x 5000 mm
90063	D = 5 mm	2 x 6000 mm
90073	D = 5 mm	2 x 7000 mm
90083	D = 5 mm	2 x 8000 mm
90093	D = 5 mm	2 x 9000 mm
90103	D = 5 mm	2 x 10000 mm
90113	D = 5 mm	2 x 11000 mm
90123	D = 5 mm	2 x 12000 mm



903**

25,4 mm

0,15 kg/m

EN Aircraft cable assembled:

RU Трос стальной в сборе:

LT Plieno trosas su kilpa:

90054	D = 6 mm	2 x 5000 mm
90064	D = 6 mm	2 x 6000 mm
90074	D = 6 mm	2 x 7000 mm
90084	D = 6 mm	2 x 8000 mm
90094	D = 6 mm	2 x 9000 mm
90104	D = 6 mm	2 x 10000 mm
90114	D = 6 mm	2 x 11000 mm
90124	D = 6 mm	2 x 12000 mm



904**

6x19 mm+pp

0,22 kg/m

EN Cable tension set

RU Устройство для натяжения троса

LT Troso įtempėjas



80016

600x80 mm

2,90 kg/pc

EN Collar press

Heavy duty table model; suitable up to cable diam. 5 mm

RU Пресс для втулки троса

Сверхпрочный; диаметр троса до 5 мм

LT Presas trosams iki 5 mm užspausti

Ypač atsparus, montuojamas ant darbastalio



88888

6,00 kg/pc

EN Cable cutter
Suitable up to cable diam. 7 mm

RU Кусачки
Диаметр троса до 7 мм

LT Žirklys
Trosams iki 7 mm



99999

0,74 kg/pc

EN Vertical track, 1,5 mm galvanized steel

RU Вертикальная направляющая, 1,5 мм оцинкованная

LT Vertikalus bėgis, 1,5 mm cinkuotas

11301 L = 3000 mm

11331 L = 3300 mm

11351 L = 3500 mm

11381 L = 3800 mm

11421 L = 4200 mm



111**

50x25x1,5 mm

1,12 kg/m

EN Track with curve, 1,5 mm galvanized steel, radius 305 mm

L = blank length, H - max. door height;

RU Горизонтальная направляющая,

1,5 мм оцинкованная, радиус загиба 305 мм;

L = длина заготовки, H - максимальная высота ворот;

LT Horizontalus lenktas bėgis, 1,5 mm cinkuotas,

Radiusas 305 mm; L = ruošinio ilgis, H - didžiausias vartų aukštis;

11303 L = 3000 mm H = 2200 mm

11333 L = 3300 mm H = 2500 mm

11353 L = 3500 mm H = 2700 mm

11383 L = 3800 mm H = 3000 mm



113*3

50x25x1,5 mm

2,24 kg/m pr

EN Track with curve, 1,5 mm galvanized steel, radius LHR

L = blank length;

RU Горизонтальная направляющая, 1,5 мм оцинкованная,

радиус загиба LHR; L = длина заготовки;

LT Horizontalus lenktas bėgis, 1,5 mm cinkuotas,

radiusas LHR; L = ruošinio ilgis;

11304 L = 3000 mm

11334 L = 3300 mm

11354 L = 3500 mm

11384 L = 3800 mm



113*4

50x25x1,5 mm

2,24 kg/m pr

EN Vertical angle 1,5 mm galvanized steel

RU Угол вертикальный 1,5 мм оцинкованный

LT Vertikalus kampas 1,5 mm cinkuotas

11426 L = 4250 mm

11456 L = 4500 mm

11506 L = 5000 mm

11556 L = 5500 mm

11606 L = 6000 mm

11656 L = 6500 mm



116**

90x62 mm

1,88 kg/m

EN **Vertical track, 2 mm galvanized steel**

RU **Вертикальная направляющая, 2 мм оцинкованная**

LT **Vertikalus bėgis, 2 mm cinkuotas**

12321	L = 3200 mm
12341	L = 3400 mm
12361	L = 3600 mm
12381	L = 3800 mm
12411	L = 4100 mm
12441	L = 4400 mm
12501	L = 5000 mm
12601	L = 6000 mm
12651	L = 6500 mm



121**

50x25x2 mm

1,49 kg/m

EN **Track with curve, 2 mm galvanized steel, radius 305 mm;**
 L = blank length; H = max. door height

RU **Горизонтальная направляющая, 2 мм оцинкованная,**
 радиус загиба 305 мм;

LT **Horizontalus lenktas bėgis, 2 mm cinkuotas, radiusas 305 mm;**

L = ruošinio ilgis; H = didžiausias vartų aukštis

12323	L = 3200 mm	H = 2400 mm
12343	L = 3400 mm	H = 2600 mm
12363	L = 3600 mm	H = 2800 mm
12383	L = 3800 mm	H = 3000 mm
12413	L = 4100 mm	H = 3300 mm
12443	L = 4400 mm	H = 3600 mm
12503	L = 5000 mm	H = 4200 mm
12603	L = 6000 mm	H = 5200 mm



123**

50x25x2 mm

2,98 kg/m pr

EN **Track with short curve for low headroom,**

2 mm galvanized steel, radius 254 mm

RU **Горизонтальная направляющая, для пониженного подъёма 2 мм**
 оцинкованная, рад. 254 мм;

LT **Horizontalus lenktas bėgis žemo pakilimo vartams, 2 mm cinkuotas,**
 radiusas 254 mm

12325	L = 3200 mm
12345	L = 3400 mm
12365	L = 3600 mm
12385	L = 3800 mm
12415	L = 4100 mm
12445	L = 4400 mm
12505	L = 5000 mm
12605	L = 6000 mm



125**

50x25x2 mm

2,98 kg/m pr

EN **Vertical angle 2 mm galvanized steel**

RU **Угол вертикальный 2 мм оцинкованный**

LT **Vertikalus kampas 2 mm cinkuotas**

12356	L = 3500 mm
12406	L = 4000 mm
12426	L = 4250 mm
12456	L = 4500 mm
12506	L = 5000 mm
12556	L = 5500 mm
12606	L = 6000 mm
12656	L = 6500 mm



126**

65x90x2 mm

2,40 kg/m

EN Reinforcement profile 1,0 mm galvanized steel, height 62 mm

RU Омега профиль 1,0 мм оцинкованный; высота 62 мм

LT Omega standumo profilis 1,0 mm cinkuotas; 62 mm aukščio

12407 L = 4000 mm

12457 L = 4500 mm

12507 L = 5000 mm

12557 L = 5500 mm

12607 L = 6000 mm

12657 L = 6500 mm

12707 L = 7000 mm

12757 L = 7500 mm



127**

71x62 mm

1,50 kg/m

EN Vertical door track 3",
 Straight, galvanized, 2,5 mm, L = 4720 mm

RU Направляющая вертикальная 3",
 Оцинкованный 2,5 мм, L = 4720 мм

LT Vertikalus bėgis 3",
 2,5 mm cinkuotas, L = 4720 mm



12479

81x39x2,5 mm

13,59 kg/pc

EN Track with curve 3", R 380 mm, galvanized, 2,5 mm

RU Горизонтальная направляющая 3", R 380 мм,
 оцинкованный 2,5 мм

LT Horizontalus lenktas bėgis 3" R 380 mm,
 2,5 mm cinkuotas



12009

750x750x2,5 mm

3,49 kg/pc

EN Vertical angle 3", galvanized steel 2,0 mm
 12549 L = 5442 mm

RU Угол вертикальный 3", оцинкованный 2,0 мм
 12549 L = 5442 mm

LT Vertikalus kampas 3", cinkuotas 2,0 mm
 12549 L = 5442 mm



12549

90x85x2 mm

16,30 kg/pc



RYTERNA GROUP

Ryternos str. 2, Biruliskes,
LT-54469 Kaunas, Lithuania
Phone: +370 37 490990;
Fax: +370 37 490991;
e-mail: info@doorcomponents.eu
www.doorcomponents.eu
www.ryterna.com



EN 13241-1
89/106/EC; 98/37/EC
73/23/EC; 89/336/EC